



# INSTALLATION INSTRUCTIONS

Accessory

FRONT NOSE MASK  
P/N 08P35-MCA-100

Application

GL1800


Publications No.

Issue Date

December 2000

**Honda Dealer: Please give a copy of this instruction to your customer.**


## PARTS LIST

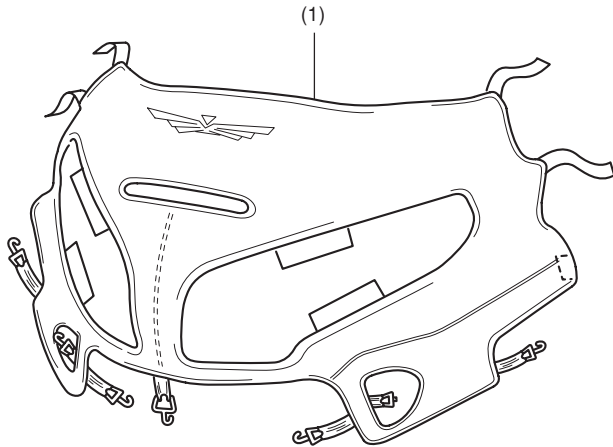


No.	Description	Q'ty
(1)	Front nose mask	1

## INSTALLATION

1. Remove the left side molding.

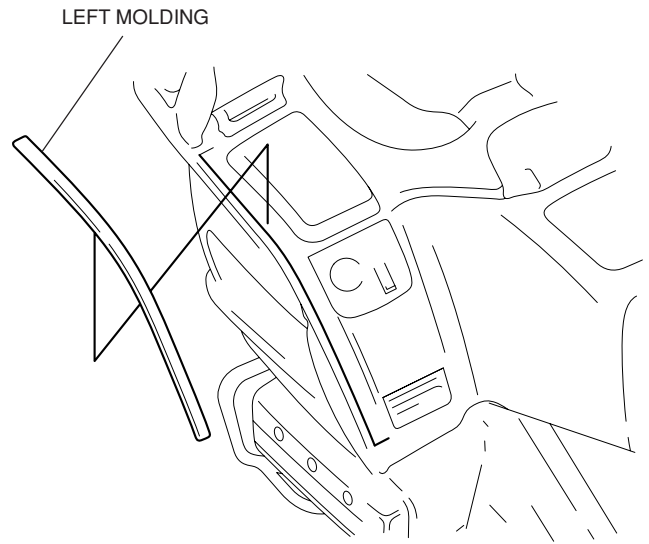


2. Remove the right side molding.

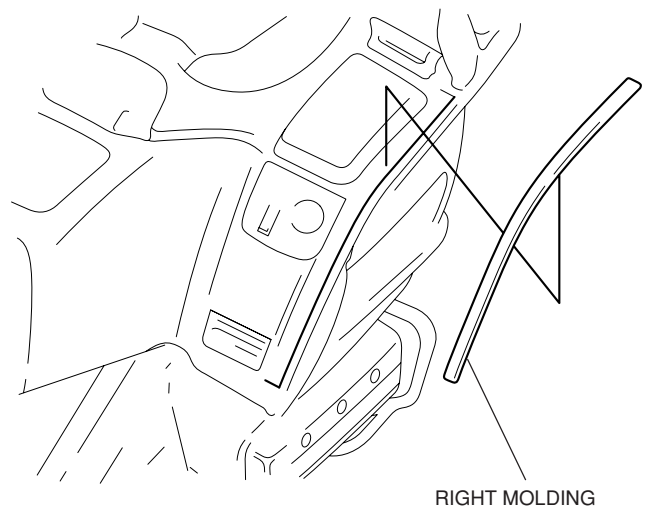


3. Install the front nose mask as shown.

**Fitting around the rear view mirror.**

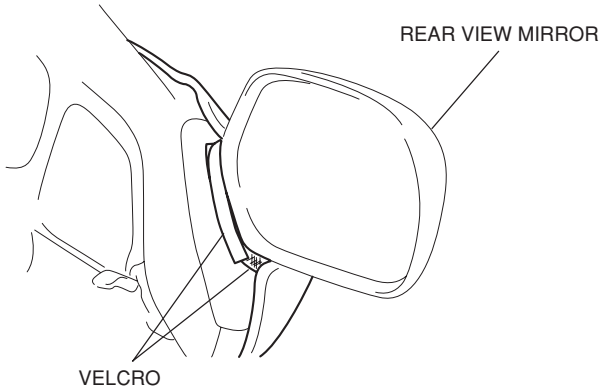


**Fitting around the side molding.**

Insert inner plate into the clearance illustrated.

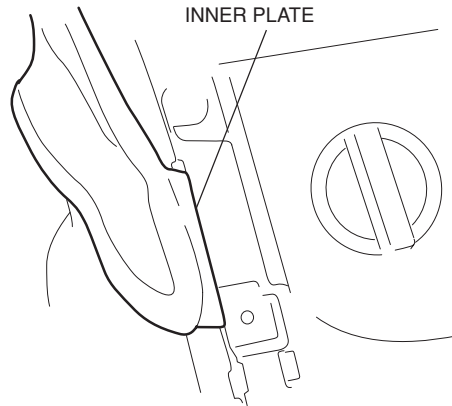


INNER PLATES  
Insert inner plate into the gap between the headlamp and the screen garnish.

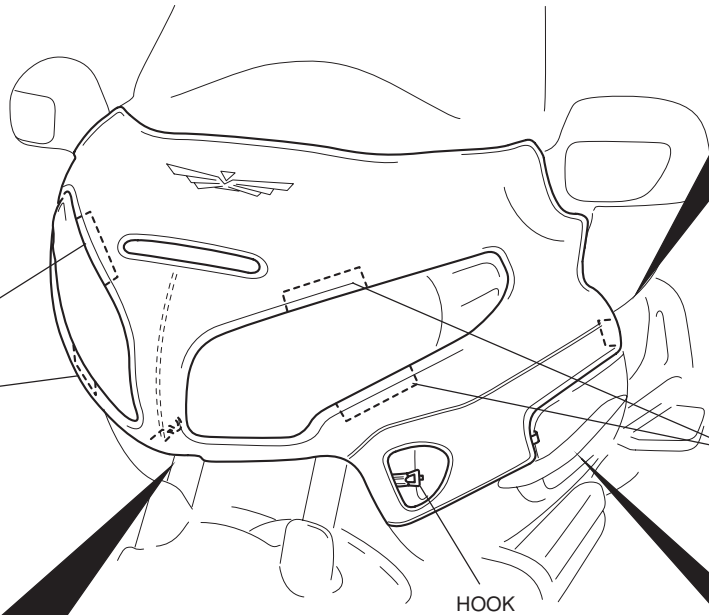


INNER PLATES  
Insert inner plate into the gap between the headlamp and the screen garnish.

**Fitting around the lower portion of front cowl.**

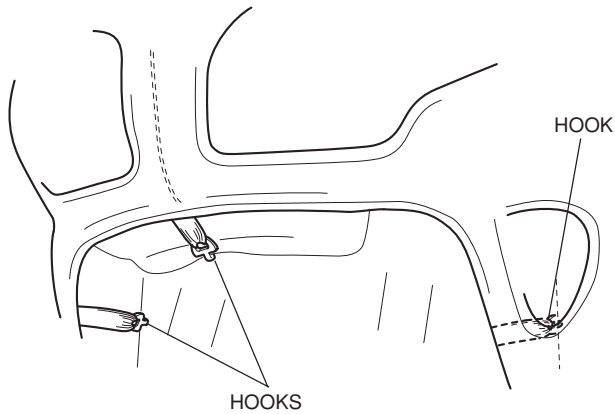

**Fitting around the side cowl.**

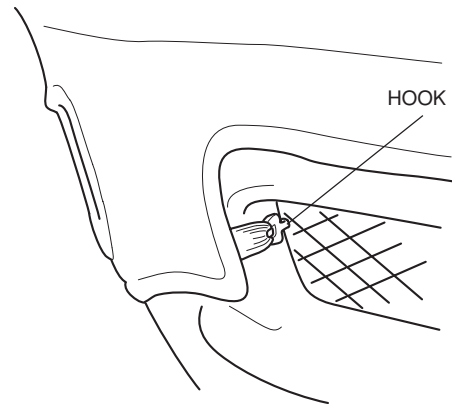

4. Reinstall the side molding in the reverse order of removal.